


- VERY COMPACT DESIGN
- R22/R410A REFRIGERANT
- "A" TYPE EVAPORATOR
- PRE-PAINTED STEEL CABINET
- FACTORY INSTALLED 24V CONTROLS
- FITS VERTICAL & HORIZONTAL APPLICATION
- PROGRAMMABLE THERMOSTAT INCLUDED



COMPACT AIR HANDLER



Washable Filter



Auto Restart Function



Auto Defrosting




Anti-Corrosion




Quiet Design



Wired Controller

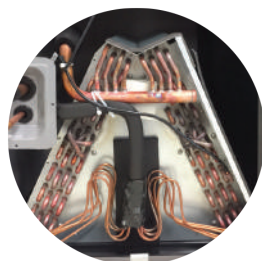

"A" TYPE EVAPORATOR

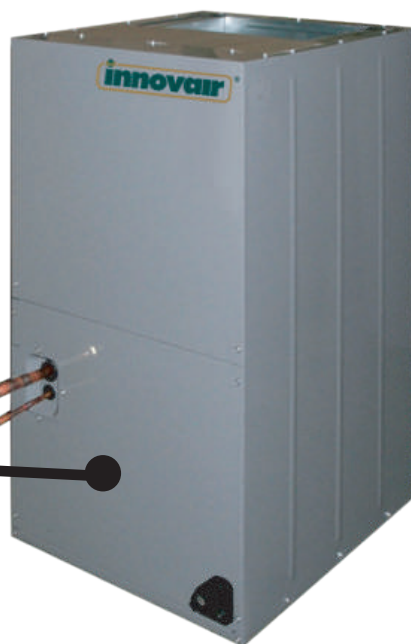

WIRED THERMOSTAT INCLUDED



24V LOW VOLTAGE SAFETY CONTROL

Download This Brochure at www.innovair.com


SYSTEM

MODEL		DXC24C2AN1	DXC36C2AN1	DXC48C2AN1	DXC60C2AN1
CAPACITY	Nominal (BTU/H)	24,000	36,000	48,000	60,000
AIRFLOW	CFM	800	1,000	1,250	1,400
POWER SUPPLY	Volt-Phase-Hertz	208/230V-1Ph-60Hz			
MOTOR	HP	1/3	1/2	3/4	3/4+
	Capacitor	6X370-440	15X370-440	12X370-440	12X370-440
	RPM	1075	1075	1075	1075
	Speed	2	2	2	2
SOUND LEVEL	dB(A)	48	51	50	51
FAN	Material	STEEL			
	No. of Fans	1	1	1	1
REFRIGERANT	Type	R22 / R410a			
REFRIGERANT CONNECTIONS	Type Flare / Sweat	SWEAT			
	Fixed or Removable	REMOVABLE			
	Liquid (in)	3/8"	3/8"	3/8"	3/8"
	Suction (in)	5/8"	3/4"	3/4"	3/4"
DRAIN CONN	Diameter	3/4"	3/4"	3/4"	3/4"
FILTERS	Type	WASHABLE			
UNIT DIMENSIONS	Height (in)	30 1/2"	30 1/2"	38 1/4"	38 1/4"
	Width (in)	18 1/8"	18 1/8"	19 3/4"	19 3/4"
	Depth (in)	20 1/2"	20 1/2"	21 3/4"	21 3/4"
UNIT WEIGHT	Gross (Lbs.)	79	86	98	113
	Height (in)	32 7/8"	32 7/8"	40 3/4"	40 3/4"
PACKAGING DIMENSIONS	Width (in)	20 1/2"	20 1/2"	22"	22"
	Depth (in)	22 1/2"	22 1/2"	23 1/2"	23 1/2"
	GROSS WEIGHT	Lbs.	84	93	108

* Specifications are subject to changes without notice.

** Model numbers, pictures, and specifications of all products are subject to change without further notice.

PERFECT FOR

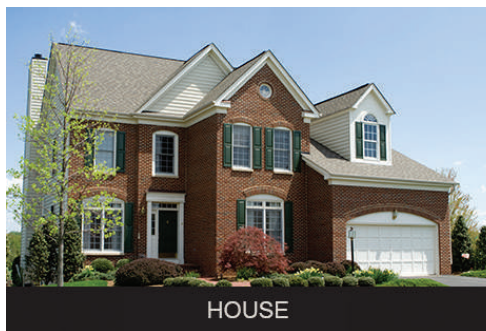

Distributed by:



© 2015 Innovair Corporation. All Rights Reserved.

Connect with us



www.innovair.com

INNEINVUIE150201